




SENTROL

1275 Series 3/8" Diameter Wing-Fit Recessed With Wire Leads Magnetic Contacts

| Gap distance | Closed loop | SPDT |
|--------------|-------------|-------|
| Regular 1/2" | 1275 | 1277 |
| Wide 1" | 1275W | 1277W |

| Color | White | Mahogany brown |
|----------|-------|----------------|
| Quantity | 10 | |

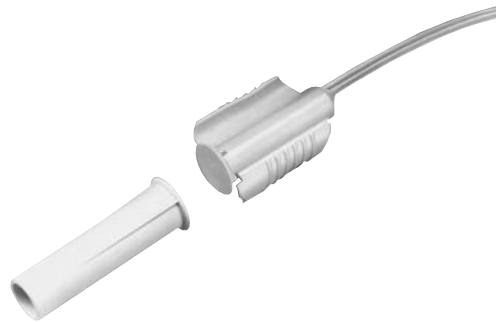

1275-N



100% TESTED




0 46188 02018 8

1275 Series Press Fit Magnetic Contacts

Installation Instructions

Drill 3/8" x 1 3/8" holes for switch and magnet. Test for continuity; connect switch into loop. Press switch and magnet into their respective holes.

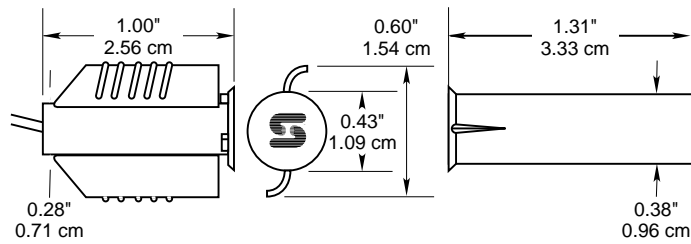

* Note: Wings compress to .375" dia. Magnet Part No. 1924 (Included)

UL Specifications

**European Union Specifications: 48 VAC/DC Max., 0.5 Amp

| Part Number | Loop Type | Electrical Configuration | Gap Distance (Up To)* |
|-------------|----------------|--------------------------|-----------------------|
| 1275 | Closed | N.O. | 1/2" |
| 1275W | Closed | N.O. | 1 1/4" |
| 1277 | Open or Closed | SPDT | 1/2" |
| 1277W | Open or Closed | SPDT | 1 1/4" |

**FORM A (1275, 1275W)

Voltage: 100 VAC/DC Max
Current: 0.5 A Max
Power: 7.5 W Max

FORM C (1277, 1277W)

Voltage: 30 VAC/DC Max
Current: 0.25 A Max
Power: 3.0 W Max

* Gap Specifications are nominal and may vary $\pm 20\%$. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

interlogix

SECURITY & LIFE SAFETY GROUP

Technical Service:

PK-0990 Rev F 10/01