




## GE Magnetic Contacts

### 1005 Series

Mini-Magnapull™ with Pull-Apart cords

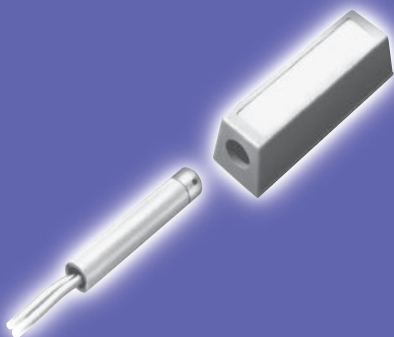

<i>Model</i>	<i>Closed Loop</i>	<i>Form</i>
1005	•	A

<i>Quantity</i>	10
-----------------	----

100% **TESTED**



604S

Connectors and Switches

1005-N



0 46188 01046 2


# 1005 Series

## Mini-Magnapull™ with Pull-Apart cords

### Installation Instructions

Switch — 1.50" L x .281" DIA.

Magnet — 1.969" x .641" W at the base, tapering to .609" W x .715" H at the top.

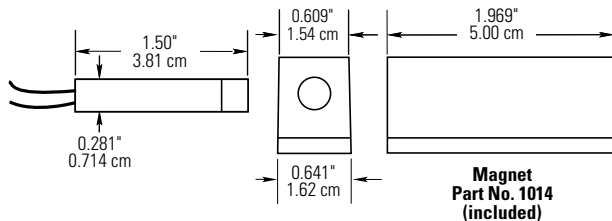

### UL Specifications

Part Number	Loop Type	Lead Type	Mount	Color
1005	Closed	3 foot Zip Cord, 22 Gauge jacketed lead	Surface	N

\*Gap specifications are nominal and may vary  $\pm 20\%$  due to temperature. Gap specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

\*\* European Union Specifications: 48 V AC/DC Max., 0.5 Amp

#### \*\* FORM A (1005)

Voltage: 100 V AC/DC Max

Current: 0.5 A Max

Power: 7.5 W Max

### CUL Specifications

All Contacts: 30 VDC, 50 mA max

Gap Specifications:\* See UL Gap Specifications



GE Interlogix