


JACKPAC® test

Test adapter

The new JACKPAC® test adapter now provides a simple way of intervening in an M12 network. It can be integrated at any point and enables quick and easy connection of a testing device via the 5 PUSH IN connections. Status indicators show the status of the 2 signal channels as well as the 24 VDC auxiliary voltage.

JP TEST

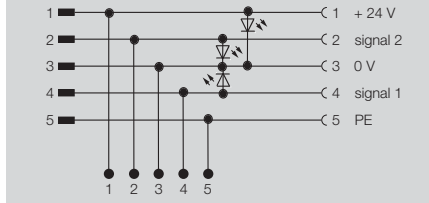

Technical data

Input

Rated control voltage
Rated current DC
Status indicator

18...24...30 V DC
2.2 mA (LED)
Green LED

Output

Continuous current power

2 A

General data

operating temperature
Storage temperature
Conductor connection system

0 °C...+55 °C
-25 °C...+70 °C
M12 plug / socket, A-coded

Dimensions

Clamping range (nominal / min. / max.) mm²
Length x width x height mm

83 / 36 / 14.4

Note

Ordering data

Connection system

Type	Qty.	Order No.
JP TEST	1	8794120000

Note

Accessories

Retaining clip
JP CLIP M: 8778490000