



# SENTROL

## 1138T Series Surface Mount Terminal

<b>Gap distance</b>	<b>Closed loop</b>	
1"	1138T	
<b>Color</b>	White	Mahogany brown
<b>Quantity</b>	10	



1138T-N



0 46188 08600 9


**100% TESTED**



## 1138T Series Magnetic Contacts Surface Mount Terminal

### Installation Instructions

- Step 1: Run the system wiring to the switch location.
- Step 2: Align and mount the switch and the magnet with either the tape or screws provided. Orient as shown in the drawing below.
- Step 3: Insert wires through the wire lead entrances into the screw terminals. Tighten the screws.

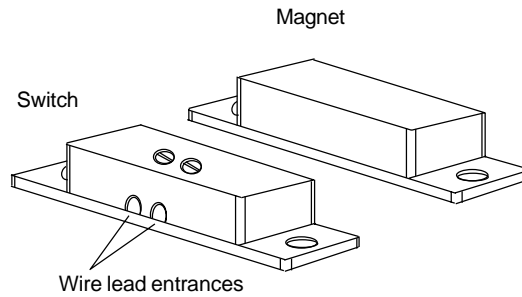

### Specifications

Part Number	Loop Type	Electrical Configuration	Gap Distance
1138T	Closed	NO	Nominal 1" Min Make 0.8" Max Break 2.2"

FORM A 1138T  
Voltage: 30VAC/DC MAX  
Current: 0.5A MAX  
Power: 7.5W MAX  
Use only wire sizes 18-22 gauge

**interlogix**  
SECURITY & LIFE SAFETY GROUP

1035748 REV B 09/01